

D series air atomizing nozzles


D series Air atomizing nozzles have special interior structure, which can evenly mix liquid & gas and generate tiny spraying drop or large spraying drop. In common situation, we can get super tiny (about 30um) liquid spraying drop by air pressure increasing or hydraulic pressure decreasing.

Adjustable Atomized can adjust liquid capacity. It can meet the requirement of spraying without change air pressure and hydraulic pressure.

Therefore, it has good adaptability. Each spray device is composed of air cap and liquid cap, which can offer two spray model, flat fan and round, with wide liquid capacity coverage. Varies available sized of inlet joint for spray nozzle. It is flexible with changeable parts. Atomizing nozzle have good moisture control.




STRUCTURE

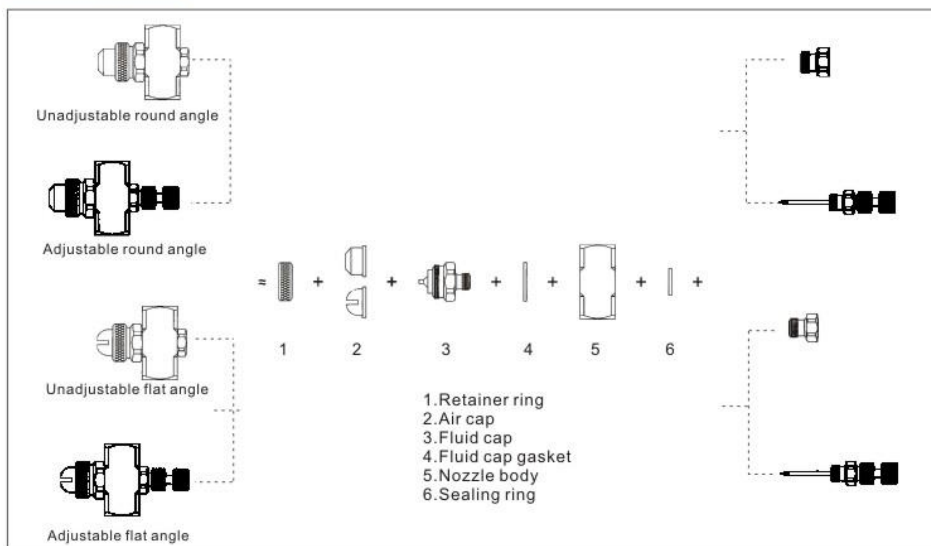


Mark :
Please note need the
regulating valve or not.
Material :
Brass
SS
316SS
Please contact our sales
engineer for detail . Besides ,
customize order is available .

BASIC NOZZLE INSTALLATIONS

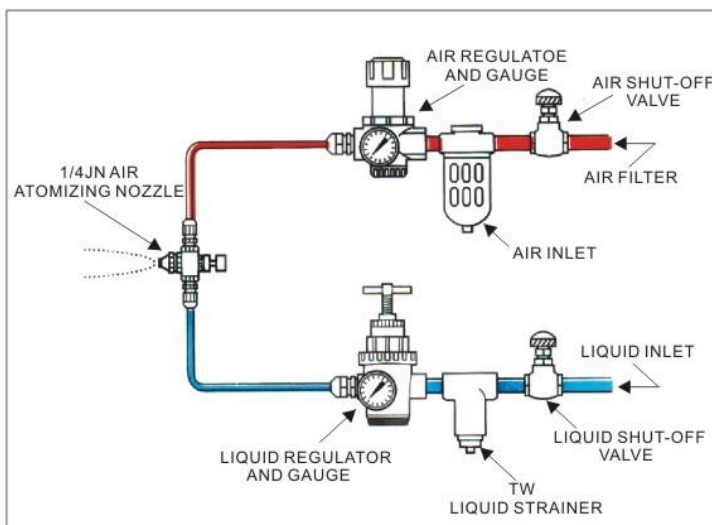

The liquid is supplied to the nozzle under pressure. Air and liquid can be externally or internally mixed to produce a completely atomized spray.

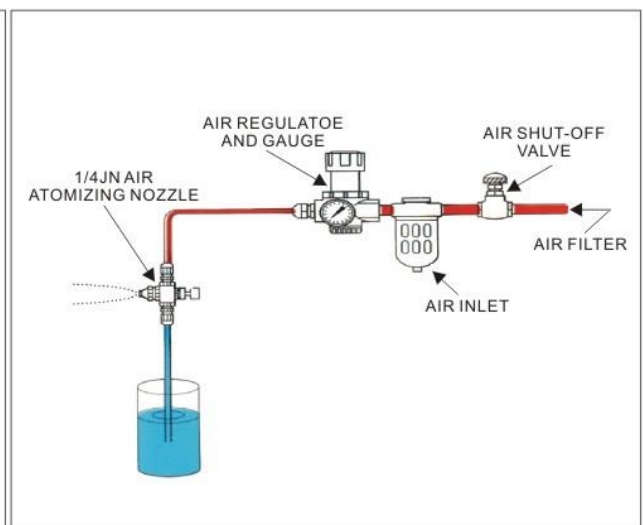


The liquid is supplied by either a liquid siphon or gravity feed. These set-ups are designed to draw liquid through the feed line into the air flow where it is atomized.

When using a Pressure-Fed Liquid System, the liquid is supplied to the nozzle under pressure. The liquid and compressed air or gas are mixed internally to produce a completely atomized spray.

FLAT SPRAY AIR CAPS: Air Caps used in these spray set-ups produce a flat spray pattern.

NOTE: The Guard Ring and Gasket must be ordered separately from the spray set-up, but are included in the standard nozzle assembly.

Spray set-up No.	Spray device consists of air cap and fluid cap	Liquid flow (L/min) and flow (L/min)															Size						
		Water pressure (bar)																					
		0.7bar			1.5bar			2bar			3bar			4bar			Air (bar)	Liquid (bar)	A (cm)	B (cm)	C (cm)	D (cm)	
Air Press ure (bar)	Water (L/h)	Air (L/min)	Air Press ure (bar)	Water (L/h)	Air (L/min)	Air Press ure (bar)	Water (L/h)	Air (L/min)	Air Press ure (bar)	Water (L/h)	Air (L/min)	Air Press ure (bar)	Water (L/h)	Air (L/min)									
SUC13A	Liquid Cap2050 and Air Cap 73328	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36			2.6
		0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0	
		1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2	
		1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5		66	6.0	5.3	104	3.5	3.0	47	61	86	3.4	
		1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0	
		1.4	2.5	40	2.7	3.3	57	3.2	3.7	65	4.6	4.2	85	5.7	3.3	116							
SUC13	Liquid Cap 2850 and Air Cap73328	1.5	2.0	44	2.8	2.8	60	3.4	3.2	68	4.9	3.1	91	7.0	2.4	122							
		0.85	8.2	19.8	1.4	14.4	27	2.1	13.5	36	2.7	19.1	42	4.6	16.1	69	1.1	0.7	36	46			2.1
		1.0	6.8	23	1.7	11.9	32	2.4	11.4	42	3.0	17.1	46	4.9	13.8	76	2.1	1.5	43	61	71	2.4	
		1.1	5.5	27	2.0	9.5	37	2.7	9.2	47	3.2	15.1	52	5.3	11.5	83	3.0	2.0	51	66	81	2.6	
		1.3	4.1	30	2.1	8.3	40	3.0	7.1	53	3.5	13.1	57	5.6	9.3	90	3.5	3.0	58	76	89	2.7	
		1.4	2.9	34	2.2	7.1	43	3.2	5.0	59	4.2	8.1	72	6.0	7.3	97	5.6	4.0	58	76	97	3.2	
SUNC13	Liquid Cap 2850 and Air Cap 73335				2.4	6.1	46	3.4	4.0	63	4.6	5.9	79	6.3	5.6	104							
					2.5	5.1	49	3.5	3.3	66	4.9	4.0	66	6.7	4.3	112							
		1.0	9.0	25	2.0	10.4	41	2.4	11.6	48	3.1	15.6	56	4.2	17.1	73	1.4	0.7	10	13			3.0
		1.1	7.8	30	2.1	9.3	45	2.5	10.4	51	3.2	14.6	59	4.6	15.0	80	2.5	1.5	13	15	17		3.7
		1.3	6.6	32	2.2	8.2	48	2.7	9.4	54	3.4	13.7	62	4.9	12.8	87	3.2	2.0	13	17	20		4.0
		1.4	5.2	36	2.5	6.1	55	3.0	7.3	61	3.8	10.8	71	5.3	11.0	94	3.8	3.0	15	22	22		4.2
SUC14	Liquid Cap2850 And Air Cap73320	1.7	3.1	44	2.8	4.3	62	3.2	5.5	68	4.2	8.5	82	5.6	9.4	103	5.3	4.0	20	25	28		4.8
		2.0	2.0	50	3.1	3	69	3.5	4.1	75	4.9	5.2	98	6.3	7.2	119							
		2.2	1.1	56	3.4	2	75	3.8	2.9	81	6.0	2.3	120	7.0	6.1	134							
		1.3	3.9	30	2.1	7.4	40	3.0	6.1	52	3.9	9.4	60	5.3	10.2	78	1.5	0.7	25	33			1.8
		1.4	3.0	33	2.4	5.3	45	3.1	5.3	54	4.2	7.2	67	5.6	8.3	84	2.7	1.5	36	51	46		2.0
		1.5	2.3	35	2.5	4.4	47	3.2	4.5	57	4.6	5.3	73	6.0	6.6	69	3.2	2.0	58	74	69		2.0
SUNC23	Liquid Cap 60100 and Air Cap125340	1.7	1.8	38	2.7	3.7	50	3.4	3.8	59	4.9	3.8	80	6.3	5.1	98	4.2	3.0	61	74	91		2.1
		1.8	1.3	41	2.8	3.1	52	3.5	3.2	62							5.6	4.0	64	76	94		2.3
		2.0	0.95	44	3	2.6	55	3.9	1.8	68													97
					3.1	2.1	57																
		1.0	17.0	23	2	2.4	44	2.4	2.8	51	3.4	3.8	72	3.9	6.5	75	1.1	0.7	10	13			2.4
		1.1		27	2.1	18.9	50	2.5	2.3	59	3.5	3.3	80	4.2	5.3	89	2.1	1.5	10	13	15		3.0
SUC23B	Liquid Cap40100 and Air Cap125328	1.3	1.6	33	2.2	14.4	56	2.7	18.9	66	3.7	2.8	89	4.6	4.0	108	2.8	2.0	13	17	17		3.4
		1.4	3.2	40	2.4	10.6	63	2.8	15.1	74	3.8	2.3	97	4.9	3.0	127	3.7	3.0	15	20	22		3.6
					2.5	7.2	71	3.0	11.7	79	3.9	19.7	105	5.3	2.1	149	4.9	4.0	20	25	28		4.0
											4.2	13.1	120	5.6	13.8	173							
											4.6	7.2	138	6.3	3.2	225							
		1.1	11.2	54	2.1	18.0	79	2.7	19.6	93	3.5	2.7	112	4.6	3.3	137	1.4	0.7	15	18			3.0
SUC23	Liquid Cap 60100and Air Cap125340	1.3	8.5	60	2.2	15.8	84	2.8	17.3	98	3.7	2.5	116	4.9	2.8	149	2.4	1.5	23	28	20		3.2
		1.4	6.5	65	2.4	13.6	89	3.0	15.2	103	3.8	2.3	121	5.3	2.4	161	3.0	2.0	25	33	33		3.4
		1.5	5.0	71	2.5	11.6	95	3.1	13.2	109	3.9	2.1	126	5.6	19.7	174	3.7	3.0	30	38	46		3.5
		1.7	3.8	77				3.2	11.4	114	4.1	18.9	132	6.0	15.7	187	5.3	4.0	33	41	46		4.0
											4.2	17.0	137	6.3	12.4	200							48
SUC43	Liquid Cap100150 and Air Cap189351	0.85	2.7	33	1.8	3.8	55	2.4	3.9	67	3.2	5.8	76	4.6	5.9	106	1.1	0.7	18	23			3.4
		1.0	2.0	38	2.1	2.8	66	2.7	3.0	77	3.5	4.7	87	5.3	4.0	132	2.4	1.5	23	30	30		3.5
		1.1	15.9	45	2.2	2.4	71	3.0	2.4	87	3.8	3.8	97	5.6	3.2	145	3.2	2.0	25	33	41		3.7
		1.3	12.5	48	2.4	2.1	76	3.2	17.8	98	3.9	3.4	103	6.0	2.6	158	3.9	3.0	30	38	43		3.8
		1.4	10.2	56	2.5	17.8	62	3.4	15.1	103	4.2	2.7	113	6.3	2.0	172	6.0	4.0	33	41	48		4.4
		1.5	7.6	62	2.7	15.1	87	3.5	12.9	109	4.6	2.0	128	6.7	15.9	185							51
SUC43	Liquid Cap100150 and Air Cap189351							3.7	10.6	114	4.9	14.8	140	7.0	12.7	198							
		1.0	2.9	90	1.8	5.6	117	2.1	10.0	119	3.0	12.6	140	4.1	14.0	181	1.0	0.7	18	20			3.4
		1.1	18.9	108	2	4.0	133	2.1	7.9	133	3.1	11.0	151	4.2	12.5	193	1.8	1.5	25	30	25		3.8
								2.4	6.2	147	3.2	9.5	163	4.6	8.9	225	2.4	2.0	25	30	43		4.3
								2.5	4.8	162	3.4	7.8	184	4.9	5.8	265	3.4	3.0	33	41	46		4.6
								2.7	3.6	177	3.5	6.2	193	5.3	3.4	305	4.9	4.0	36	43	53		
										3.7	4.8	210	5.6	16.7	340							58	
										3.8	3.7	225											

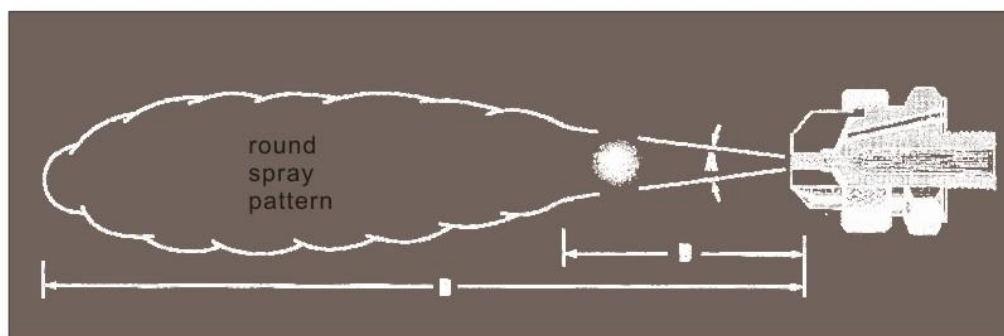

DESIGN FEATURES

For the round spray pattern, angle "A" is maintained throughout distance "B". Beyond "B", the spray becomes turbulent and will project out to distance "D".

When using a Pressure-Fed system, the liquid is supplied to the nozzle under pressure.

The liquid and compressed air or gas are mixed internally to produce a completely atomized spray.

ROUND SPRAY AIR CAPS

Air caps used in these spray set-ups produce a narrow full cone round spray

NOTE

The Guard Ring and Gasket must be ordered separately from the spray set-up, but are included in the standard nozzle assembly.

Round spray

Spray set-up No	Spray device consists of air cap and fluid cap	Liquid flow (L/min) and flow (L/min)															Size				
		Water pressure (bar)																			
		0.7bar			1.5bar			2bar			3bar			4bar							
Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air (bar)	Liquid (bar)	Spray angle A	B (cm)	D (cm)		
SUC11	Liquid cap 2050 and Air Cap 67147	0.7	2.5	15.6	1.1	6.4	11.9	1.4	6.4	13.9	2.7	6.2	23	3.5	7.8	28					
		0.85	1.8	19.0	1.4	5.0	15.0	1.7	5.5	16.7	2.8	5.7	25	3.7	7.3	29	0.85	0.7	13°	30	2.7
		1.0	1.4	22	1.7	4.1	18.7	2.0	4.5	19.8	3.0	5.2	27	3.9	6.4	33	1.7	1.5	13°	33	3.0
					1.8	3.4	20	2.2	3.4	24	3.1	4.7	29	4.2	5.5	38	2.5	2.0	13°	36	3.4
					2.0	3.0	23	2.4	3.0	26	3.2	4.3	31	4.5	4.5	43	3.1	3.0	14°	39	3.8
					2.1	2.6	25	2.5	2.5	28	3.4	3.9	33	4.6	4.1	45	4.5	4.0	15°	44	4.4
SUC12A	Liquid cap 2050 and Air Cap 73160				2.2	2.0	27	2.7	2.3	31	3.7	3.0	38	4.8	3.7	47					
		0.7	2.5	18.7	1.4	5.7	29	1.7	6.7	29	2.2	9.2	34	2.8	11.9	39					
		0.85	2.0	22	1.5	5.2	32	1.8	6.4	31	2.5	8.2	39	3.1	11.0	43	0.85	0.7	12°	43	3.7
		1.0	1.6	26	1.7	4.8	35	2.0	5.8	34	2.8	7.2	44	3.4	10.1	47	1.5	1.5	13°	46	4.0
					1.8	4.3	37	2.1	5.2	37	3.0	6.7	47	3.7	9.2	52	2.4	2.0	13°	48	4.3
					2.0	3.9	40	2.2	4.8	40	3.1	6.3	49	3.9	8.4	58	3	3.0	13°	51	4.6
SUC12	Liquid cap 2850 and Air Cap 73160				2.1	3.4		2.4	4.3	43	3.2	5.9	52	4.2	7.6	62	3.9	4.0	15°	56	5.2
								2.7	3.6	48	3.4	5.5	55	4.5	6.8	68					
		0.85	4.8	21	1.7	8.4	31	2.0	10.7	33	2.7	16.5	37	3.4	20	43					
		1.1	4.1	27	1.8	7.5	35	2.1	9.6	37	2.8	15.4	38	3.7	18.4	47	1.5	0.7	12°	48	4.0
		1.4	3.4	33	2.0	7.0	37	2.4	8.2	42	3.1	13.6	43	3.9	16.8	50	2.5	1.5	13°	51	4.3
		1.5	3.1	35	2.2	5.7	44	2.7	6.8	48	3.4	11.8	49	4.2	15.2	55	3	2.0	13°	53	4.6
SUC22B	Liquid cap 40100 and Air Cap 1401110	1.7	3.0	39	2.5	4.8	49	3.0	5.9	55	3.7	10.4	55	4.5	13.8	60	3.4	3.0	14°	56	4.9
		1.8	2.9	41	2.8	4.1	54	3.2	5.0	59	3.9	9.1	61	4.8	12.4	65	4.2	4.0	15°	60	5.3
		2.0	2.8	44	3.1	3.6	59	3.5	4.1	65	4.2	7.9	65	4.9	11.8	68					
		1.1	13.0	76	2.2	17.8	116	2.8	2.0	136	3.4	3.2	149	4.6	3.7	193					
		1.4	8.9	91	2.5	13.1	130	3.1	16.3	149	3.9	2.5	170	5.3	2.9	220	1.7	0.7	18°	66	4.9
		1.5	7.2	90	2.8	9.5	143	3.4	11.9	163	4.6	15.9	205	5.6	2.5	235	2.8	1.5	20°	76	6.1
SUC22	Liquid cap 60100 and Air Cap 1401110	1.7	5.8	105	3.1	7.0	157	3.9	7.0	187	5.3	9.1	240	6.0	2.1	250	3.9	2.0	20°	81	6.7
		1.8	4.7	112	3.4	4.9	171	4.2	4.7	205	5.6	6.8	255	6.3	17.4	270	5.3	3.0	21°	91	7.9
		2.0	3.6	119	3.5	4.2	179	4.6	3.0	220	6.0	5.0	275	6.7	14.0	290	6	4.0	21°	97	9.1
		2.1	2.7	127							6.3	3.6	290	7.0	11.0	305					
		0.85	3.1	57	1.4	6.1	69	2.1	5.3	96	2.7	8.0	103	3.8	8.8	135					
		1.0	2.5	66	1.5	6.4	76	2.4	4.1	112	3.0	6.9	117	4.2	7.3	156	1	0.7	17°	61	4.9
SUC42	Liquid cap 100150 and Air Cap 1891125	1.1	18.5	75	1.7	4.8	85	2.7	3.1	127	3.2	5.9	130	4.6	6.1	176	1.8	1.5	18°	69	5.8
		1.3	12.9	85	1.8	4.1	93	2.8	2.6	136	3.5	4.9	146	4.9	4.6	196	2.8	2.0	20°	76	6.7
					2.0	3.5	102	3.0	2.2	144	3.7	4.4	154	5.3	3.9	215	3.5	3.0	20°	79	7.0
					2.1	3.0	110				3.8	3.7	161	5.6	3.1	240	4.9	4.0	21°	91	8.5
					2.2	2.5	119				3.9	3.5	170	6.0	2.3	260					
		1.0	4.4	86	1.4	12.5	79	2.0	12.3	108	2.2	19.9	86	3.0	25.0	99					
SUC42	Liquid cap 100150 and Air Cap 1891125	1.1	3.2	102	1.5	10.6	91	2.1	10.8	119	2.5	17.4	110	3.2	22.5	120	1	0.7	19°	89	6.1
					1.7	8.7	105	2.2	9.5	130	2.8	14.6	133	3.5	20.5	141	1.7	1.5	20°	99	7.0
					1.8	7.0	118	2.4	7.9	143	3.1	12.1	154	3.8	18.2	163	2.4	2.0	21°	104	7.6
					2.0	5.5	130	2.5	6.4	155	3.2	10.8	166	4.1	15.9	184	3.1	3.0	21°	107	7.9
								2.7	5.2	166	3.4	9.5	176	4.6	12.1	225	3.5	4.0	22°	117	9.1
								2.8	4.2	178	3.5	8.4	187	4.9	9.3	255					

DESIGN FEATURES


For the Round Spray pattern, angle "A" is maintained throughout distance "B". Beyond "B", the spray becomes turbulent and will project out to distance "D". When using a Pressure-Fed Liquid System, the liquid is supplied to the nozzle under pressure. The liquid and compressed air or gas are mixed internally to produce a completely atomized spray.

WIDE-ANGLE ROUND SPRAY AIR CAPS

Air Caps used in these Spray Set-ups produce a wide-angle round spray

NOTE

The Guard Ring and Gasket must be ordered separately from the spray set-up, but are included in the standard nozzle assembly.

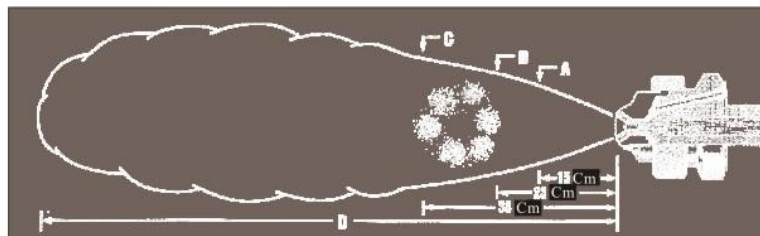

Wide-angle round spray

Spray set-up No.	Spray set-up consists of air cap and fluid cap combination	Liquid flow (L/min) and flow (L/min)																Size					
		water pressure (bar)																					
		0.7bar			1.5bar			2bar			3bar			4bar			Air (bar)	Liquid (bar)	A (cm)	B (cm)	C (cm)	D (cm)	
Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)	Air pressure (bar)	Water (L/h)	Air (L/min)						
SUK16	Liquid Cap 2050 and Air Cap 67-6-20-70°	0.6	5.3	10.2	1.1	6.1	13.3	1.5	8.1	16.4	2.4	8.9	22	3.1	10.5	24	0.7	0.7	14	18	23	1.5	
		0.7	4.3	12.2	1.3	7.0	15.0	1.8	6.6	21	2.7	8.1	26	3.4	9.7	28	1.4	1.5	15	19	24	1.1	
		0.85	3.0	14.2	1.4	6.4	17.0	2.1	4.9	25	3.0	6.4	30	3.9	7.8	36	1.8	2.0	16	20	25	2.1	
		1.0	1.7	17.0	1.5	5.5	19.0	2.4	3.2	29	3.2	4.9	34	4.2	6.1	42	3.0	3.0	16	20	26	2.7	
					1.7	4.5	22.0				3.4	4.2	37	4.6	4.4	47	3.9	4.0	19	23	30	4.0	
					1.8	3.5	24.0				3.5	3.4	40	4.9	2.8	54							
SUK26B	Liquid Cap 60100 and Air Cap 140-6-37-70°	0.85	7.0	5.0	1.7	13.2	68	2.0	18.5	68	2.8	25	84	3.7	31	96							
		1.0	2.1	6.2	1.8	9.8	79	2.1	15.1	76	3.0	22	92	3.8	28	105	0.85	0.7	18	24	31	1.8	
								2.2	11.7	85	3.1	18.5	101	3.9	26	113	1.7	1.5	19	25	33	2.4	
											3.2	15.1	119	4.1	23	122	2.1	2.0	19	25	33	3.2	
											3.4	12.1	130	4.2	20	130	3.2	3.0	20	26	26	4.1	
											3.5	9.1	142	4.6	13.6	153	4.1	4.0	21	28	28	5.9	
SUK26	Liquid Cap 60100 and Air Cap 140-6-37-70°	0.7	2.4	32	1.4	43	37	2.1	33	66	2.8	52	76	3.7	63	68						36	
		0.85	13.6	44	1.5	35	49	2.2	26	78	3.0	46	87	3.8	68	79	1.85	0.7	19	25	37	2.1	
		1.0	7.6	57	1.7	28	61	2.4	18.9	89	3.1	39		3.9	52	101	1.5	1.5	20	27	37	3.2	
					1.8	21	71	2.5	11.7	100	3.2	33	99	4.2	41	111	2.4	2.0	20	27	38	4.1	
											3.4	26	110	4.6	27	138	3.2	3.0	20	28	39	5.0	
											3.5	19.5	122	4.9	15.9	166	3.9	4.0	20	28		6.8	
SUK29	Liquid Cap 60100 and Air Cap 140-6-52-70°										3.7	13.2	133										
		1.3	3.6	85	2.1	57	116	3.1	53	156	4.2	64	197	5.6	74	245							
		1.5	2.9	102	2.4	51	130	3.2	50	163	4.9	51	230	6.0	68	260	2.0	0.7	20	25	33	5.5	
		1.8	2.3	117	2.7	45	143	3.4	47	170	5.6	40	265	6.3	62	280	3.0	1.5	20	27	34	6.4	
		2.0	19.7	125	3.0	39	157	3.5	45	177	6.0	34	285	6.7	56	295	3.9	2.0	22	28	37	8.2	
		2.1	16.7	133	3.2	33	170	3.9	38	194	6.3	28	300	7.0	51	315	6.0	3.0	23	29	38	9.1	
SUK30	Liquid Cap 40100 and Air Cap 120-6-35-60°	2.3	14.0	142	3.5	28	185	4.6	25	230	6.7	22	320				6.3	4.0	24	32	41	10.4	
		2.4	11.4	149	4.2	13.6	220	4.9	18.5	245	7.0	17.8	335										
		1.1	12.3	40	2.2	16.3	62	2.7	21	69	4.2	19.3	100	5.6	22	130							
		1.3	9.9	45	2.5	12.1	71	3.0	16.3	78	4.6	14.6	113	6.0	17.6	142	1.5	0.7	15	19	23	2.7	
		1.4	7.9	50	2.8	8.9	79	3.2	12.3	86	4.9	10.8	124	6.3	14.0	152	3.0	1.5	16	20	24	4.6	
		1.5	6.1	54	3.0	7.6	83	3.4	10.7	91	5.3	8.1	135	6.7	11.4	163	3.4	2.0	16	20	24	5.5	
SUK46	Liquid Cap 100150 and Air Cap 189-6-62-70°	1.7	4.9	58	3.1	6.4	87	3.5	9.3	94	5.6	6.2	146	7.0	9.1	174	5.3	3.0	18	22	25	7.3	
		1.8	3.9	62	3.2	5.5	91	3.9	6.4	105	6.0	4.9	157				6.3	4.0	19	24	30	9.4	
		2.0	3.1	67	3.4	4.7	95	4.2	4.7	115	6.3	4.0	167										
		1.7	2.5	156	3.0	39	230	3.4	50	250	4.6	62	320	6.0	93	395	2.0	0.7	24	33	46	5.5	
		1.8	19.7	167	3.1	33	240	3.5	43	260	4.9	47	345	6.3	77	425	3.2	1.5	25	34	47	6.4	
		2.0	15.1	178	3.2	27	255	3.7	41	275	5.3	36	375	6.7	62	460	3.9	2.0	28	37	51	7.3	
		2.1	11.4	193	3.4	23	265	3.9	27	300	5.6	26	405	7.0	52	495	5.3	3.0	29	38	53	7.9	
		2.3	7.6	205	3.5	18.5	280	4.1	23	310	6.0	18.9	435				6.3	4.0	33	42	58	9.8	
					3.7	14.8	290	4.2	18.9	320	6.3	13.6	460										
								4.4	15.9	335													

ORDERING INFORMATION

D ——— 1/4 ——— SUK23B ——— PP
 ↓ ↓ ↓ ↓
 Nozzle type Inlet conn. Spray set-up No. Material code

COMMON APPLICATION

- Wool spraying & Moisturization
- Mould lubrication
- Spraying injection
- Air disinfection